

FINALLY a 5-star * * * * * tanning shower







PERFECT VENTILATION FOR 5-STAR COMFORT

Dual ventilation: dedicated cooling for the body and separate cooling for lamps and components.

A STATE-OF-THE-ART tanning shower, with an incredible quality/price ratio, developed for heavy-duty and long-lasting professional use, which will allow you to achieve the UTMOST client CLIENT SATISFACTION and the BEST OPERATING PROFIT at an incredible price.

ART. 25165

WAIKIKI BEACH



CONNECT YOUR SMARTPHONE

LISTEN TO ALL YOUR FAVOURITE MUSIC!

Bluetooth°



THE CONTROL PANEL,

available on the keypad inside the shower, lets you manage the following functions:

- -Start/stop treatment.
- -Use with radio or handsfree Bluetooth by connecting your smartphone.
- Increase and decrease body ventilation, from minimum to maximum speed.
- -Select radio frequencies.
- -Adjust radio volume.

FUNCTIONS OF THE PROVIDER MENU

- Set minutes of the session.
- Manual function.
- -View time as countdown or progressive.
- -Set default radio station when switched on.
- Default radio volume when switched on.
- Maximum settable volume.
- Enable/disable radio during standby.
- -Read and reset daily minutes.
- Read and reset session hours.
- Machine hours.





Front door with 5 RGB LED types of lighting



STATE-OF-THE-ART TECHNOLOGY FOR AMAZING RESULTS


Electronic ballasts

Higher efficiency and immediate.

Lamp switch-on - No Starter.

The state-of-the-art

electronic ballasts assure the best power supply stability, a crucial prerequisite for maximum lamp life and constant irradiation, free from annoying flickering.

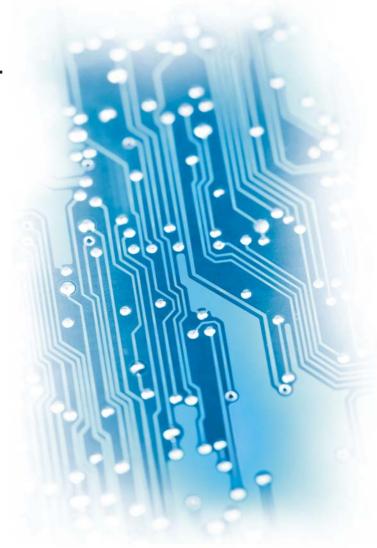

Transparent handle for an elegant and harmonious colour effect





Inner LED courtesy light



TECHNICAL DATA

Air extraction			Power supply		
Body compartment hole	1x Ø 450 mm		Power supply	3P+N+T 400V~50/60 Hz	9,1 kW (Max current 20 A per phase).
Utility compartment holes	2x Ø 120 mm			Single-phase power supply strictly to be noted when	32A socket
Ventilation flow rate	Body: 3400 m³/h Utility compartment: 780 m³/h	The utility compartment flow rate is the sum of the two individual ones 390 + 390 m3/h	Optional	ordering the appliance. 1P+N+G 230 V~ 50/60 Hz. 9.1 kW. 63A socket.	


Optional

Art. 25099	Clamp for fastening the hot air extraction pipe Ø 457 mm (1 piece)	
Art. 25166	Clamp for fastening the hot air extraction pipe Ø 127 mm (1 piece)	
Art. 25167	Hot air ejection hose Ø 127 mm (1 metre)	
Art. 25168	Hot air ejection hose Ø 457 mm (1 metre)	

WAIKIKI




Shower with closed door






Shower with open door



Dimensions

Shower with closed door	2290 x 1100 x 1100 mm	
Shower with open door	2290 x 1220 x 1900 mm	
Shower interior	2060 x 760 x 760 mm	



Packaging

1 package consisting of 4 boxes	2150 x 1160 x 1670 mm Including transport pallet		
Volume	4,16 m ³		
Weight	Net weight: 280 kg Gross weight: 336 kg		



≪MÜSTER & DIKSON S.p.A.

MÜSTER & DIKSON S.P.A. Via Privata da via Kennedy snc 20023 Cerro Maggiore (MI) - Italy Tel. 0331-525111 (r.a.) e-mail: sales@muster-dikson.com

Export Department: Tel. +39 0331-525111 (r.a.) e-mail: export@muster-dikson.com

EXPO MÜSTER AREA SUD Via Massafra, 30i 74015 Martina Franca (TA) - Italy Tel. 080-4838400 e-mail: expo.sud@muster-dikson.com

